
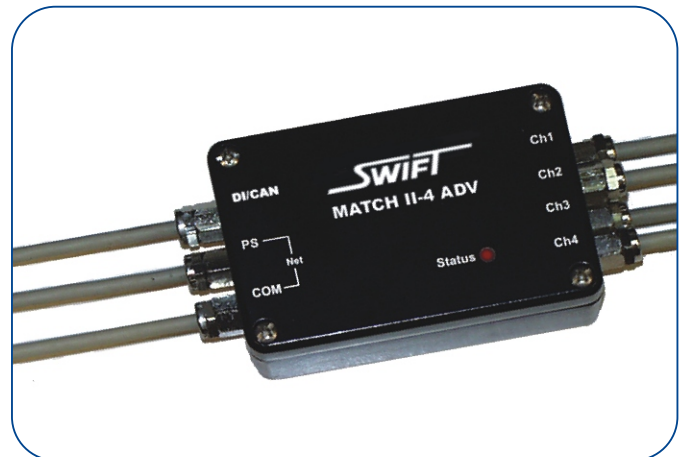


MAS MATCH-II-ADV SYSTEM

The MAS MATCH-II-ADV contains various new features, that i.a. were added on user requests.

The Highlights of the new MAS MATCH-II-ADV:

- New, faster and more powerful micro controller, hence increased computing power
- Compatible to MAS MATCH-II and MAS MATCH-II-4
- **Up to 4** (instead of 2) virtual channels
- **1.888 Mbyte** (instead of 864kByte) internal SRAM with buffer battery
- Built-in self-test and diagnosis functions
- Compact casing like the MAS MATCH-II / MAS MATCH-II-4

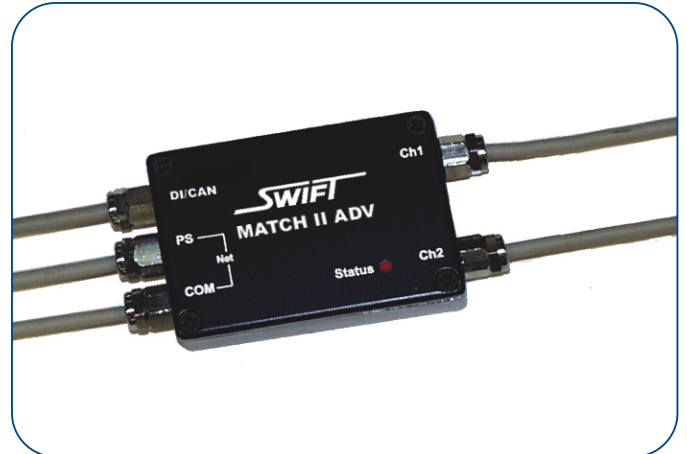

Options:

- CAN Bus connection
- Double data transmission rate via RS232 (57,600 Baud)
- Higher sampling frequencies up to 10kHz per channel (5kHz with MAS MATCH-II-4-ADV)

Subject to technical alterations
(Rev. 1.0_080605)

SWIFT GmbH is certified
for aviation systems

Gesellschaft für Messwerterfassungs-Systeme mbH

Am Dieburger Berg 18
Tel. +49 (0) 6162 - 82 0 86
Fax +49 (0) 6162 - 82 6 04

D-64354 Reinheim
info@swift-online.de
www.swift-online.de