


Round Three Axis Load Cell

Model TR3D-A-*

- 1,000 lbf, 3,000 lbf, 5,000 lbf and 10,000 lbf capacities
- Measures forces in three perpendicular directions
- Environmentally protected
- Temperature compensated
- Rugged construction

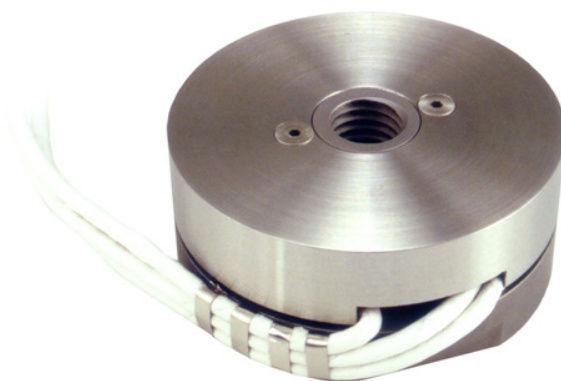

Description

Michigan Scientific's *TR3D-A-** Round Three Axis Load Cells are ideal for applications that require force measurements in three perpendicular directions. Available in 1,000 lbf, 3,000 lbf, 5,000 lbf and 10,000 lbf capacities, these compact transducers are well suited for an unlimited variety of applications.


The *3K*, *5K* and *5/5/10K* models are made of high grade stainless steel material, and the *1K* model is made of high grade aluminum. These materials, in addition to weatherproof sealing, combine to provide excellent resistance to corrosion and environmental conditions. Temperature compensation of the transducers ensure stable output throughout a wide temperature range. In addition, the transducers are configured for easy adaptation to a variety of applications.

Specifications

| | TR3D-A-1K | TR3D-A-3K | TR3D-A-5K | TR3D-A-5/5/10K |
|---------------------------------------|---|--------------------------|--------------------------|---|
| Maximum Load Capacity (per channel) | 1,000 lbf (4.4 kN) | 3,000 lbf (13.3 kN) | 5,000 lbf (22 kN) | X & Y axes 5,000 lbf (22 kN) Z axis 10,000 lbf (44 kN) |
| Maximum Moment Capacity (per channel) | 30 lbf · ft (40 N · m) | 160 lbf · ft (215 N · m) | 210 lbf · ft (280 N · m) | 210 lbf · ft (280 N · m) |
| Full Scale Output | 4.0 mV/V, nominal, all channels | | | |
| Sensor | 3 four-arm strain gauge bridges | | | |
| Nonlinearity | <0.5 % of full scale output | | | |
| Hysteresis | <0.5 % of full scale output | | | |
| Temperature Range, Usable | -40 °F to 300 °F (-40 °C to 149 °C) | | | |
| Excitation Voltage, Maximum | 10 Vdc or Vac rms | | | |
| Standard Cable Length | 10 ft (3.05 m) shielded, open-ended leads | | | |

Round Three Axis Load Cell


TR3D-A-1K and TR3D-A-3K Configuration

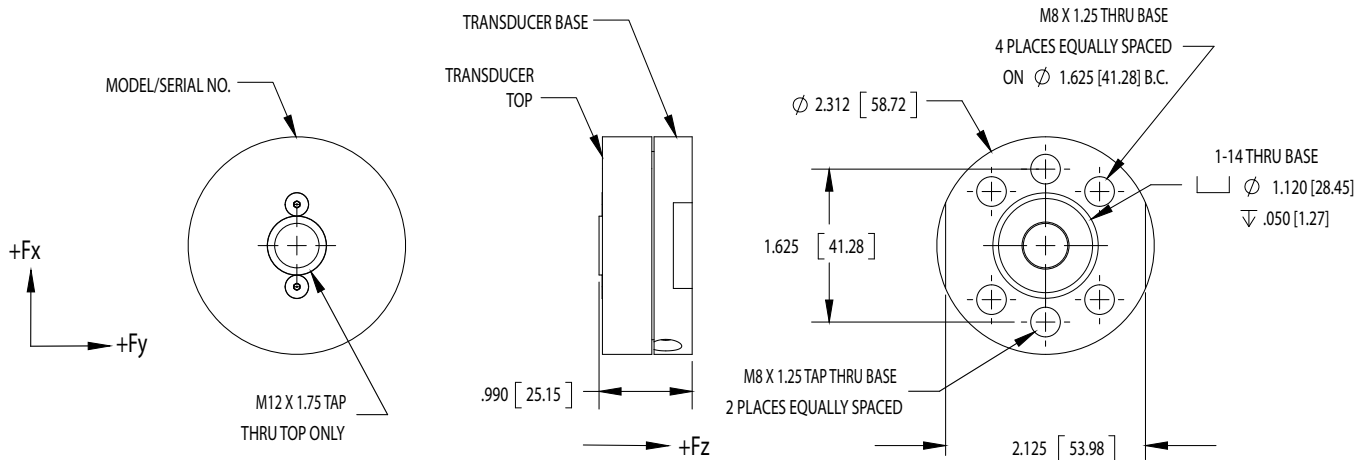

NOTES:

- FOR CLARITY, SOME HIDDEN LINES AND TRANSDUCER GEOMETRY NOT SHOW.
- DIMENSIONS ARE IN in [mm]
- POSITIVE OUTPUTS RESULT WHEN THE TRANSDUCER TOP IS DISPLACED RELATIVE TO THE TRANSDUCER BASE IN THE DIRECTIONS INDICATED.

TR3D-A-5K and TR3D-A-5/5/10K Configuration

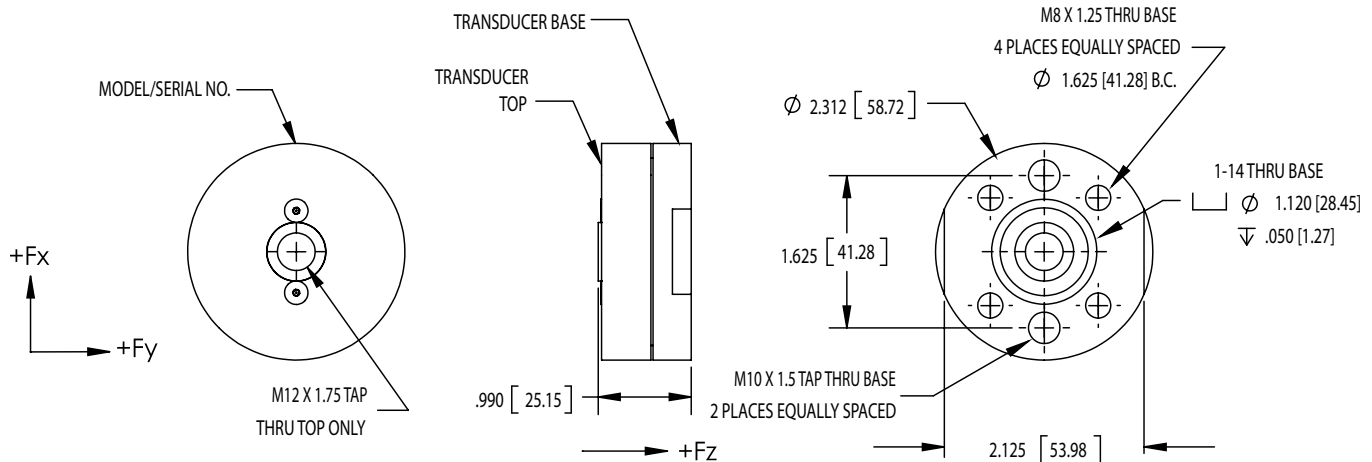

NOTES:

- FOR CLARITY, SOME HIDDEN LINES AND TRANSDUCER GEOMETRY NOT SHOWN.
- DIMENSIONS ARE IN in [mm].
- POSITIVE OUTPUTS RESULT WHEN THE TRANSDUCER TOP IS DISPLACED RELATIVE TO THE TRANSDUCER BASE IN THE DIRECTIONS INDICATED.

Ordering Options

Connector and optional cable length may be specified by the customer.

Contact Michigan Scientific for information on transducer applications and mounting.

8500 Ance Road
Charlevoix, MI 49720
Tel: 231-547-5511
Fax: 231-547-7070
03-7-22
Rev. A

MICHIGAN SCIENTIFIC
corporation

<http://www.michsci.com>
Email: mscinfo@michsci.com

321 East Huron Street
Milford, MI 48381
Tel: 248-685-3939
Fax: 248-685-5406